COMMERCIAL
DRIVE WAY STANDARDS
TYPE A DESIGN
CITY OF EL DORADO, KANS.

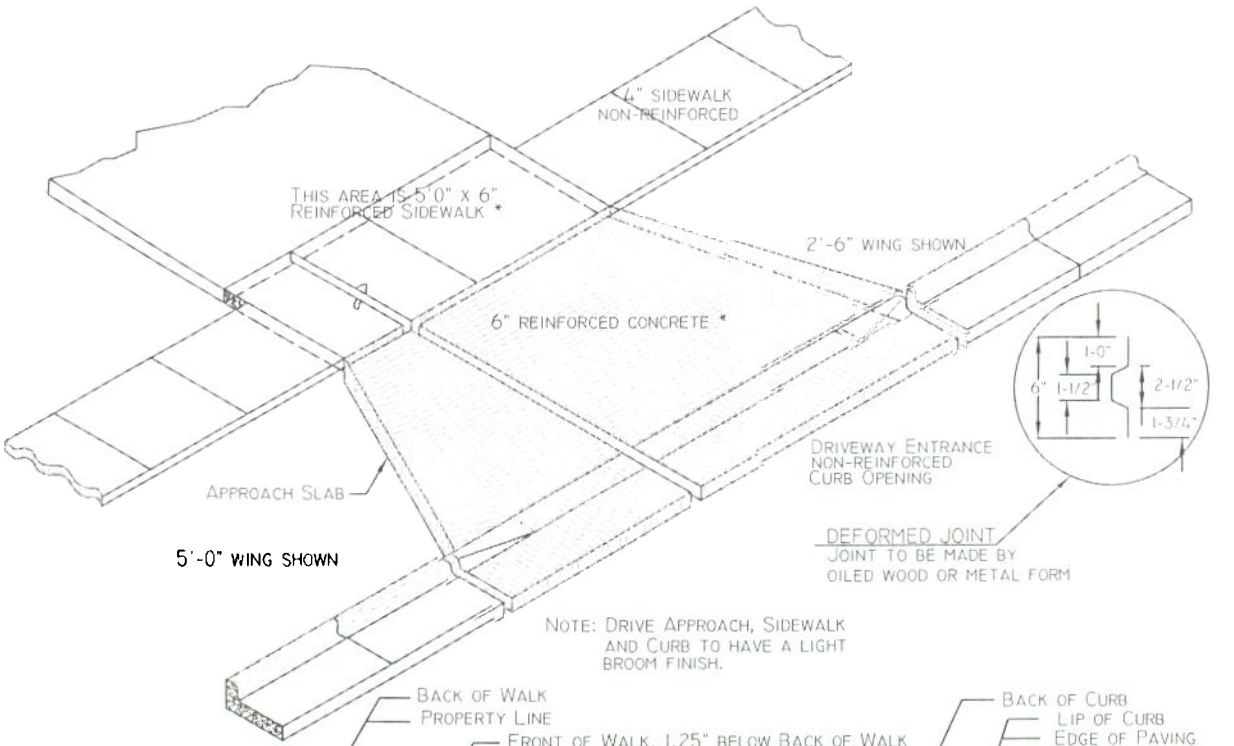

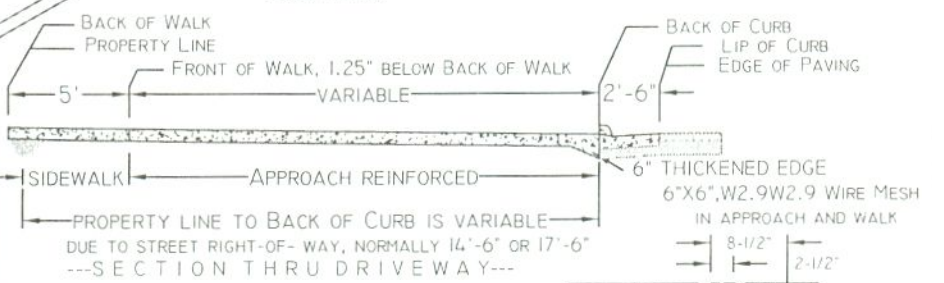

---SPECIAL NOTE---

CITY PROJECTS REQUIRE CONTRACTORS TO USE A CLASS A, AE CONCRETE MIX, P.S.I. 4000.

THIS IS SIMILAR TO A 6 SACK SMALL ROCK MIX WITH AIR ADDED. THIS MIX IS ALSO RECOMMENDED FOR HOME USE.

A VIBRATOR OR SIMULAR DEVICE WILL BE REQUIRED FOR ALL APPROACH AREAS.

NOTE:

6" REINFORCED CONCRETE. *
6"X6",W2.9XW2.9 WIRE MESH MUST BE PLACED IN ALL NEW DRIVEWAY ENTRANCES, ACROSS ALL SIDEWALKS AND IN ALL APPROACH SLABS.

NOTE:

MAXIMUM GRADE FROM FLOWLINE OF CURB AND GUTTER TO FRONT OF WALK IS 1-1/4" RISE PER FT. OF TRAVEL, OR 11"ABOVE TOP OF CURB. MINIMUM GRADE FROM FLOWLINE OF CURB AND GUTTER TO FRONT OF WALK IS 1/2" RISE PER FOOT OF TRAVEL, OR 1" ABOVE TOP OF CURB.

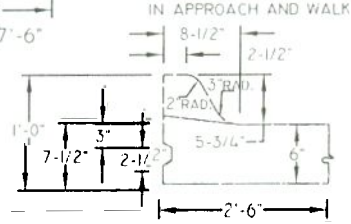

TO LIP OF CURB
3/8" RISE PER FOOT OF TRAVEL FROM FLOWLINE
---DRIVE CURB---
SECTION
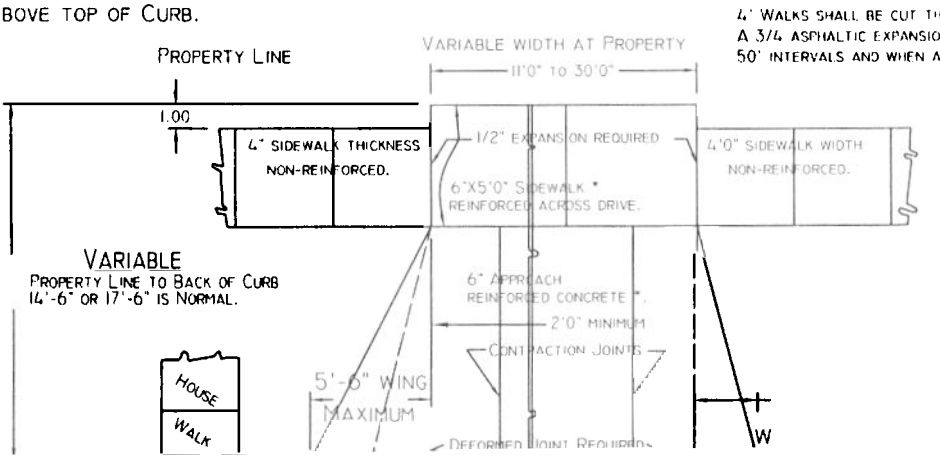
4' WALKS SHALL BE CUT THROUGH AT 4'0" INTERVALS. A 3/4 ASPHALTIC EXPANSION JOINT SHALL BE PLACED AT 50' INTERVALS AND WHEN ABUTTING ANY CURB.